


ARS Active+ - specification

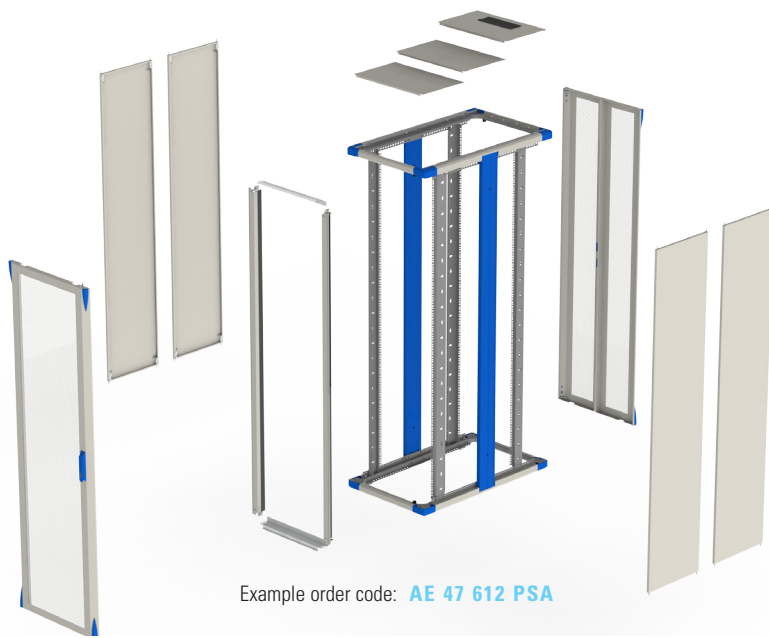

Included as standard:

- Two pairs of 19" mounting rails
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Nylon skids
- Single doors configured LH hinged as standard
- Doors fitted with standard key locking swing handle with 2-point locking
- Doors fitted with quick release hinge
- Flat vented doors front
- Double vented doors rear
- Quick release side panels both sides
- Top panels configuration: basic brush entry panel rear all other panels are plain
- Air management baffle kit
- Earth bonding kit
- Available in standard light grey with blue or black trim or black with black trim

Configuration	Application	Width mm		600		Configuration see page 33			
		Depth mm	1000	1200	Build	Sides	Colour	Base	
Active+ Rack	AE	42U	610	612	P	S	A		
		47U	610	612	P	S	A		
		52U	610	612	P	S	A		

See pages 6-7 for platform application compatibility