


ARS Switch - specification

Included as standard:

- Two pairs of 19" mounting rails
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Nylon skids
- Single doors configured LH hinged as standard
- Doors fitted with standard key locking swing handle with 2-point locking
- Doors fitted with quick release hinges
- Flat vented front door
- Double vented rear door
- Quick release side panels both sides
- Top panels configuration: basic brush entry panel rear all other panels are plain
- Air management baffle kit
- Earth bonding kit
- Available in standard light grey with blue or black trim or black with black trim

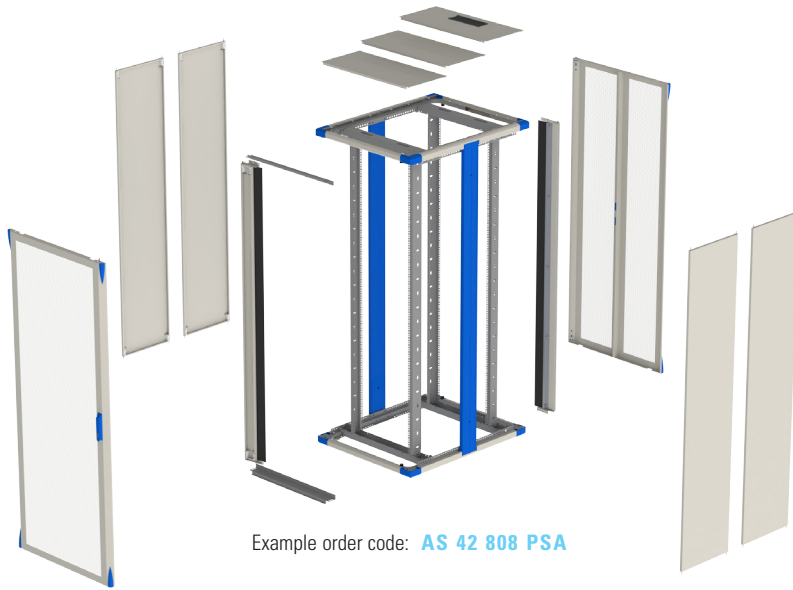

Example order code: **AS 42 808 PSA**

Configuration	Stem	Width mm	800			Configuration see page 33			
		Depth mm	875	1000	1200	Build	Sides	Colour	Base
Switch Rack	AS	42U	808	810	812	P	S	A	
		47U	808	810	812	P	S	A	
		52U	808	810	812	P	S	A	

See pages 6-7 for platform application compatibility