


DRS Network - specification

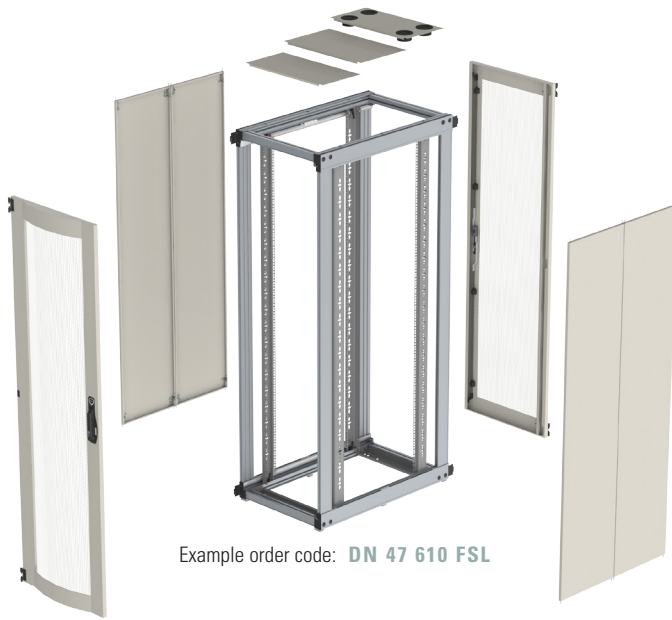

Example order code: **DN 47 610 FSL**

Included as standard:

- 4 post frame configuration
- Two pairs of 19" mounting rails
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Nylon skids
- Doors configured LH hinged as standard
- Doors fitted with standard key locking swing handle with 2-point locking
- Hi-Flo curved vented front door
- Flat vented rear door
- Top panel configuration: grommet entry panel rear all other panels are plain
- Quick release side panels both sides
- Earth bonding kit
- Available in standard light grey or black

Configuration	Application	Width mm	600				800				Configuration see page 42			
		Depth mm	875	1000	1200	1400	875	1000	1200	1400	Build	Sides	Colour	Base
Network Rack	DN	42U	608	610	612	614	808	810	812	814	F	S	L	
		47U	608	610	612	614	808	810	812	814	F	S	L	
		52U	608	610	612	614	808	810	812	814	F	S	L	

See pages 6-7 for platform application compatibility