


Standard rack system (SRS)

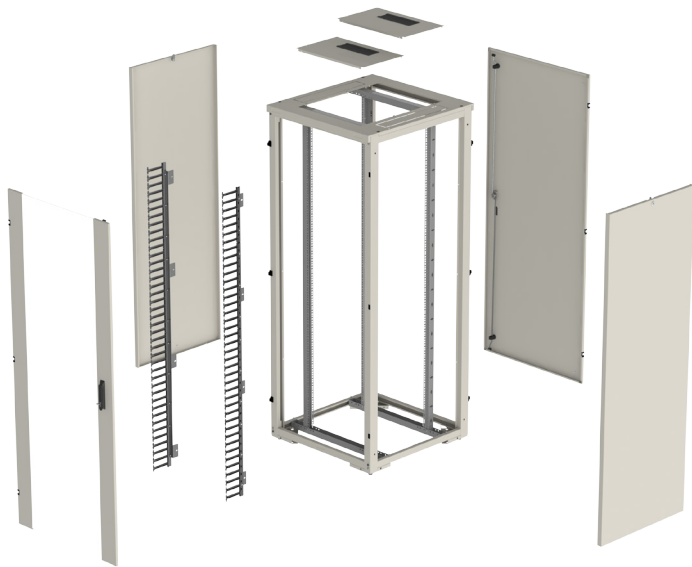

Example order code: **SC 47 808 PSGJ**

SRS Cabling - specification

Included as standard:

- Two pairs of 19" mounting rails
- Front mounting rails fitted with cable management fingers
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Jacking feet
- Doors configured LH hinged as standard
- Glazed front door
- Plain steel rear door
- Doors fitted with standard key locking swing handle with 3-point locking
- Top panels configuration: basic brush entry panel all positions
- Plain locking side panels both sides
- Earth bonding kit
- Available in standard light grey or black

Note:

Can be configured with B-Line's high density in-line cooling modules, providing high cooling density single racks or pods. Please see thermal management section in this catalogue.

Configuration	Application	Width mm			Configuration see page 25				
		Depth mm	800	1000	1200	Build	Sides	Colour	Base
Cabling Rack	SC	42U	808	810	812	P	S	L	J
		47U	808	810	812	P	S	L	J

See pages 6-7 for platform application compatibility